

Screens for EPS (expandable polystyrene) Block molding machine

In V-shaped wire

Product specifications

- Slot opening: 0,25 mm
- Surface profile: 22S – 28S
- Support profile: 10x3
- Open area: 10.2% up to 12%
- Can be reinforced to withstand the desired ΔP
- Can be machined to match the exact dimensions

Benefits Trislot® filter elements

- High open area =
- Low steam consumption




Possible to build-in in existing equipment (custom made)

Alloys

Mainly AISI 304, 430, other alloys available

Quality assurance

- Trislot focuses on Total Quality Management
- 50 years of experience
- ISO 9001 Certified

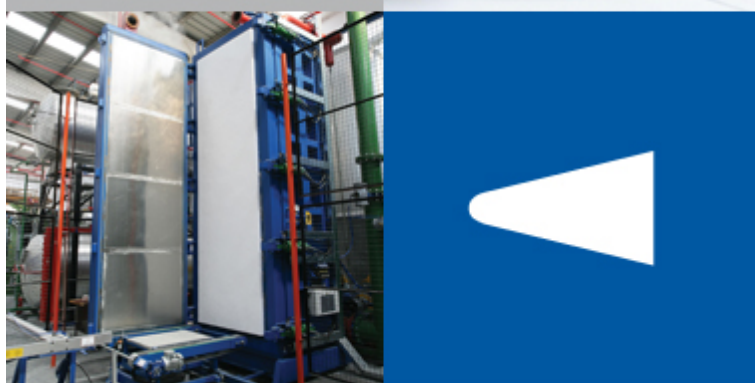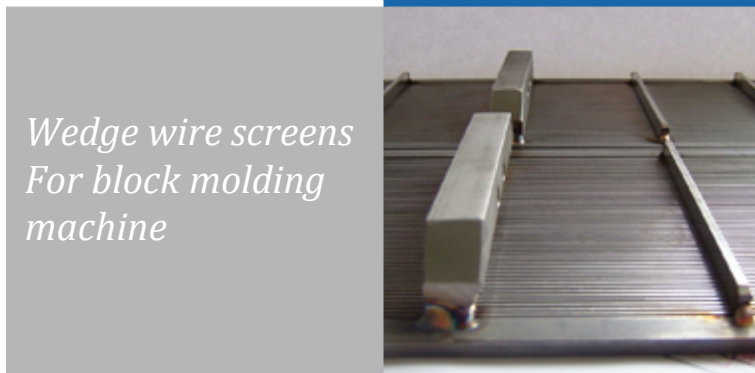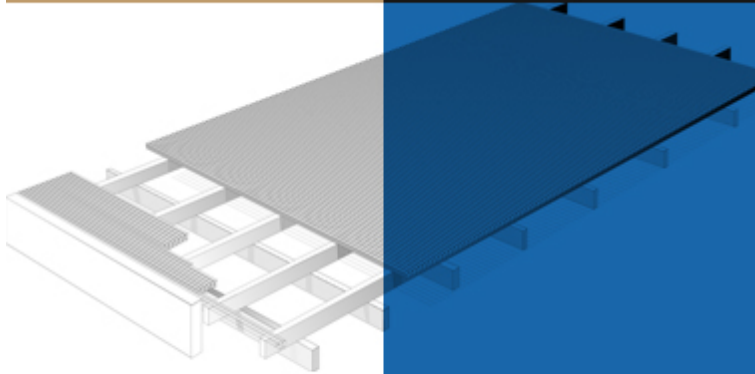

TRISLOT NV
ROTERLJSTRAAT 134
B-8790 WAREGEM
BELGIUM
T +32 56 62 72 22
F +32 56 62 72 62
INFO@TRISLOT.BE
WWW.TRISLOT.BE